

QTP5 1X14...35

QUICKTRONIC PROFESSIONAL 5 | ECG for FL 16 mm



Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

Product benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Perfect lamp start for applications with motion sensors
- Automatic restart after lamp replacement
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: up to 100,000 h (temperature at $T_c = 65$ °C, max. 10 % failure rate)
- Energy Efficiency Index EEl: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

Product datasheet

Technical data

Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Operating frequency	40...50 kHz
Max. ECG no. on circuit breaker 10 A (B)	17 ¹⁾
Max. ECG no. on circuit breaker 16 A (B)	28 ¹⁾
Inrush current	24 A

¹⁾ Type B

Light technical data

Starting time	1.0 s ¹⁾
---------------	---------------------

¹⁾ If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

Dimensions & weight



Length	280.0 mm
Width	30.0 mm
Height	21.0 mm
Mounting hole spacing, length	270.0 mm
Product weight	171.00 g

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 %

Lifespan

Product datasheet

ECG lifetime	100000 h ¹⁾
---------------------	------------------------

¹⁾ At $T_{case} = 65^{\circ}\text{C}$ at T_c point / 10% failure rate

Expected Lifetime

Product name	Lamp group				
QTP5 1X14...35	HE 35 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	60	65
		Lifetime [h]	100000	100000	90000

Capabilities


Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2

Certificates & standards

Approval marks – approval	VDE / VDE-EMC / CE / ENEC 10
EEL – Energy Label	A2 BAT
Standards	Acc. to EN 61347-2-3/Acc. to EN 60929/Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547
Protection class	III





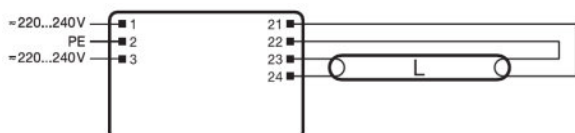





Product datasheet

Wiring Diagram










Wiring diagram

Download Data

File	
	Product Datasheet QUICKTRONIC PROFESSIONAL QTP5
	Product Datasheet ECG lifetime - QUICKTRONIC non DIM
	Product Family Datasheet Family data sheet QTP5
	Certificates EMC-Marks approval
	Certificates INOTEC
	Certificates CEAG
	Certificates ENEC-VDE-Marks approval
	Certificates VDE Quality Tested Simplified luminaire approbation
	Certificates Manufacturer's declaration LampECG combinations: Frequent switching
	Certificates VDE-EMC-Certificate QT5

Product datasheet

	Certificates 592319_EAC certificate for Quicktronics QT
	Declarations of conformity CE conformity
	Installation/Operation notice Technical guide - ECGs for T5-lamps
	Operating instructions EAC QTP5
	CAD data 3-dim QTP5 1x14-35, QTP5 1x24-39, QTP5 1x49, QTP5 1X54
	CAD data 3-dim QTP5 1x14-35, QTP5 1x24-39, QTP5 1x49, QTP5 1X54
	CAD data PDF QTP5 1x14-35, QTP5 1x24-39, QTP5 1x49, QTP5 1X54

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321329035	QTP5 1X14...35	Shipping carton box 20	303 mm x 101 mm x 159 mm	4.87 dm ³	3586.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QTP5 1X14...35

QUICKTRONIC PROFESSIONAL 5 | ECG for FL 16 mm

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
QTP5 1X14...35	DULUX L 16 W HE	0.08 A	17.50 W	1500 lm	1
	DULUX L 22 W HE	0.11 A	24.00 W	2055 lm	1
	DULUX L 26 W HE	0.13 A	29.00 W	2470 lm	1
	DULUX L 28 W HE	0.13 A	28.50 W	2550 lm	1
	HE 13 W ES	0.075 A	15.00 W	1150 lm	1
	HE 14 W	0.08 A	16.00 W	1200 lm	1
	HE 19 W ES	0.10 A	22.00 W	1800 lm	1
	HE 21 W	0.11 A	24.00 W	1900 lm	1
	HE 25 W ES	0.12 A	27.00 W	2450 lm	1
	HE 28 W	0.14 A	31.00 W	2600 lm	1
	HE 32 W ES	0.15 A	34.00 W	3100 lm	1
	HE 35 W	0.17 A	38.00 W	3300 lm	1
	HE 35 W XT	0.17 A	38.00 W	3300 lm	1