

HQI-E 70 W/WDL CO

POWERSTAR HQI-E coated | Metal halide lamps for open and enclosed luminaires



Areas of application

- Shopping arcades
- Conference rooms, auditoriums, libraries
- Factories and workshops
- Exhibition halls and trade fairs
- Rail stations, overground and underground
- Pedestrian zones, public squares
- Outdoor applications only in suitable luminaires

Product benefits

- E27 or E40 screw base for simple lamp handling
- Different light colors

Benefits of OSRAM UV filter technology

- Reduced material stress within the luminaire
- The UV filter on the lamp complies with the requirements of IEC 61167



Product datasheet

Technical data

Electrical data

Nominal wattage	70.00 W
Rated wattage	70.00 W
Lamp current	1.0 A
PFC capacitor at 50 Hz	12 μ F ¹⁾
Ignition voltage	3.6 / 5.0 kVp ²⁾
Rated lamp efficacy (standard condition)	67 lm/W


¹⁾ At rated voltage and $\cos \varphi \geq 0.9$

²⁾ Minimum / Maximum

Photometrical data

Rated luminous flux	4700 lm
Color rendering index Ra	75
Color temperature	2900 K
Rated LLMF at 2,000 h	0.61
Rated LLMF at 4,000 h	0.49
Rated LLMF at 6,000 h	0.47
Rated LLMF at 8,000 h	0.46
UV protection	Yes

Dimensions & weight



E27
IEC 7004-21

Diameter	55.0 mm
Length	141.0 mm
Product weight	75.43 g

Temperatures & operating conditions

Maximum permitted outer bulb temperature	330 °C
--	--------

Product datasheet

Maximum permitted base edge temperature	210 °C
---	--------

Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.97
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.85
Lifespan B50	10000 h

Additional product data

Base (standard designation)	E27
Design / version	Coated
Mercury content	12.0 mg

Capabilities

Dimmable	No
Burning position	Any
Enclosed luminaire required	No

Certificates & standards

Energy efficiency class	A
Energy consumption	77 kWh/1000h


Country specific categorizations

ILCOS	MES/UB-150/730-H/E/SL-E27-56/141
-------	----------------------------------


Safety advice

NAV 100 W chokes and HQI 150 W igniters are suitable for operating HQI-E 100 W lamps.


Product datasheet

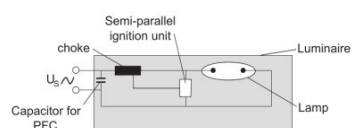

Circuit diagram



Circuit diagram

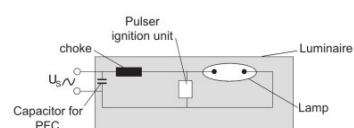

Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300397801	HQI-E 70 W/WDL CO	Shipping carton box 20	355 mm x 207 mm x 294 mm	21.60 dm ³	2606.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

HQI-E 70 W/WDL CO

POWERSTAR HQI-E coated | Metal halide lamps for open and enclosed luminaires

Product name	Product name ECG	EAN
HQI-E 70 W/WDL CO	PT-FIT 70/220-240 I	4008321377685
	PT-FIT 70/220-240 S	4008321386649
	PTi 2x70/220-240 I	4008321910042
	PTi 2x70/220-240 S	4008321910028
	PTi 70/220-240 I	4008321099501
	PTi 70/220-240 S	4008321049629
	PTo 70/220-240 3DIM	4008321959355